

Outdoor IP54 Waterproof Power Station



5040Wh

Capacity

5000Watt

Output Power

7000Watt

Peak Surge Power

Brand packaging



W5



AC Charging Cable



Anderson-MC4 Cable



User Manual



Warranty Card

North America
&
Japan



W5- N



W5- E

• Capacity

- AC Output
- USB-A output
- USB-C output
- AC Charge Input
- PV(Anderson) Input
- Waveform
- Size
- Net Weight

5040Wh (48V ; 105Ah)

100~120V/4000W (Rated) ; 7000W (Peak)

5V/3A; 9V/1.8A; 12V/1.5A (18W Max)

5V/3A; 7V/2.4A; 9V/1.8A; 12V/1.5A

90~140Va.c 16A Max 1800W Max

12~150Vd.c 15A Max 2100W Max

Sine Wave

33.6*20.2*19.8in (852.5*512*502mm)

150.57lb (68.3kg)

5040Wh (48V ; 105Ah)

220~240V/5000W (Rated) ; 7000W (Peak)

5V/3A; 9V/1.8A; 12V/1.5A (18W Max)

5V/3A; 7V/2.4A; 9V/1.8A; 12V/1.5A

200~240Va.c 16A Max 2500W Max

12~150Vd.c 15A Max 2100W Max

Sine Wave

33.6*20.2*19.8in (852.5*512*502mm)

150.57lb (68.3kg)

Function Description- W5- N



Function Description- W5-E



Function Description



OUTPUT

AC Output

PURE SINE WAVE CURRENT

Pure sine wave -- No damage to electrical appliances



Correction Wave -- damager to electrical appliances




INPUT

AC Input

Slow Charging: **900W**
Fast Charging: **1800W**




PV Input

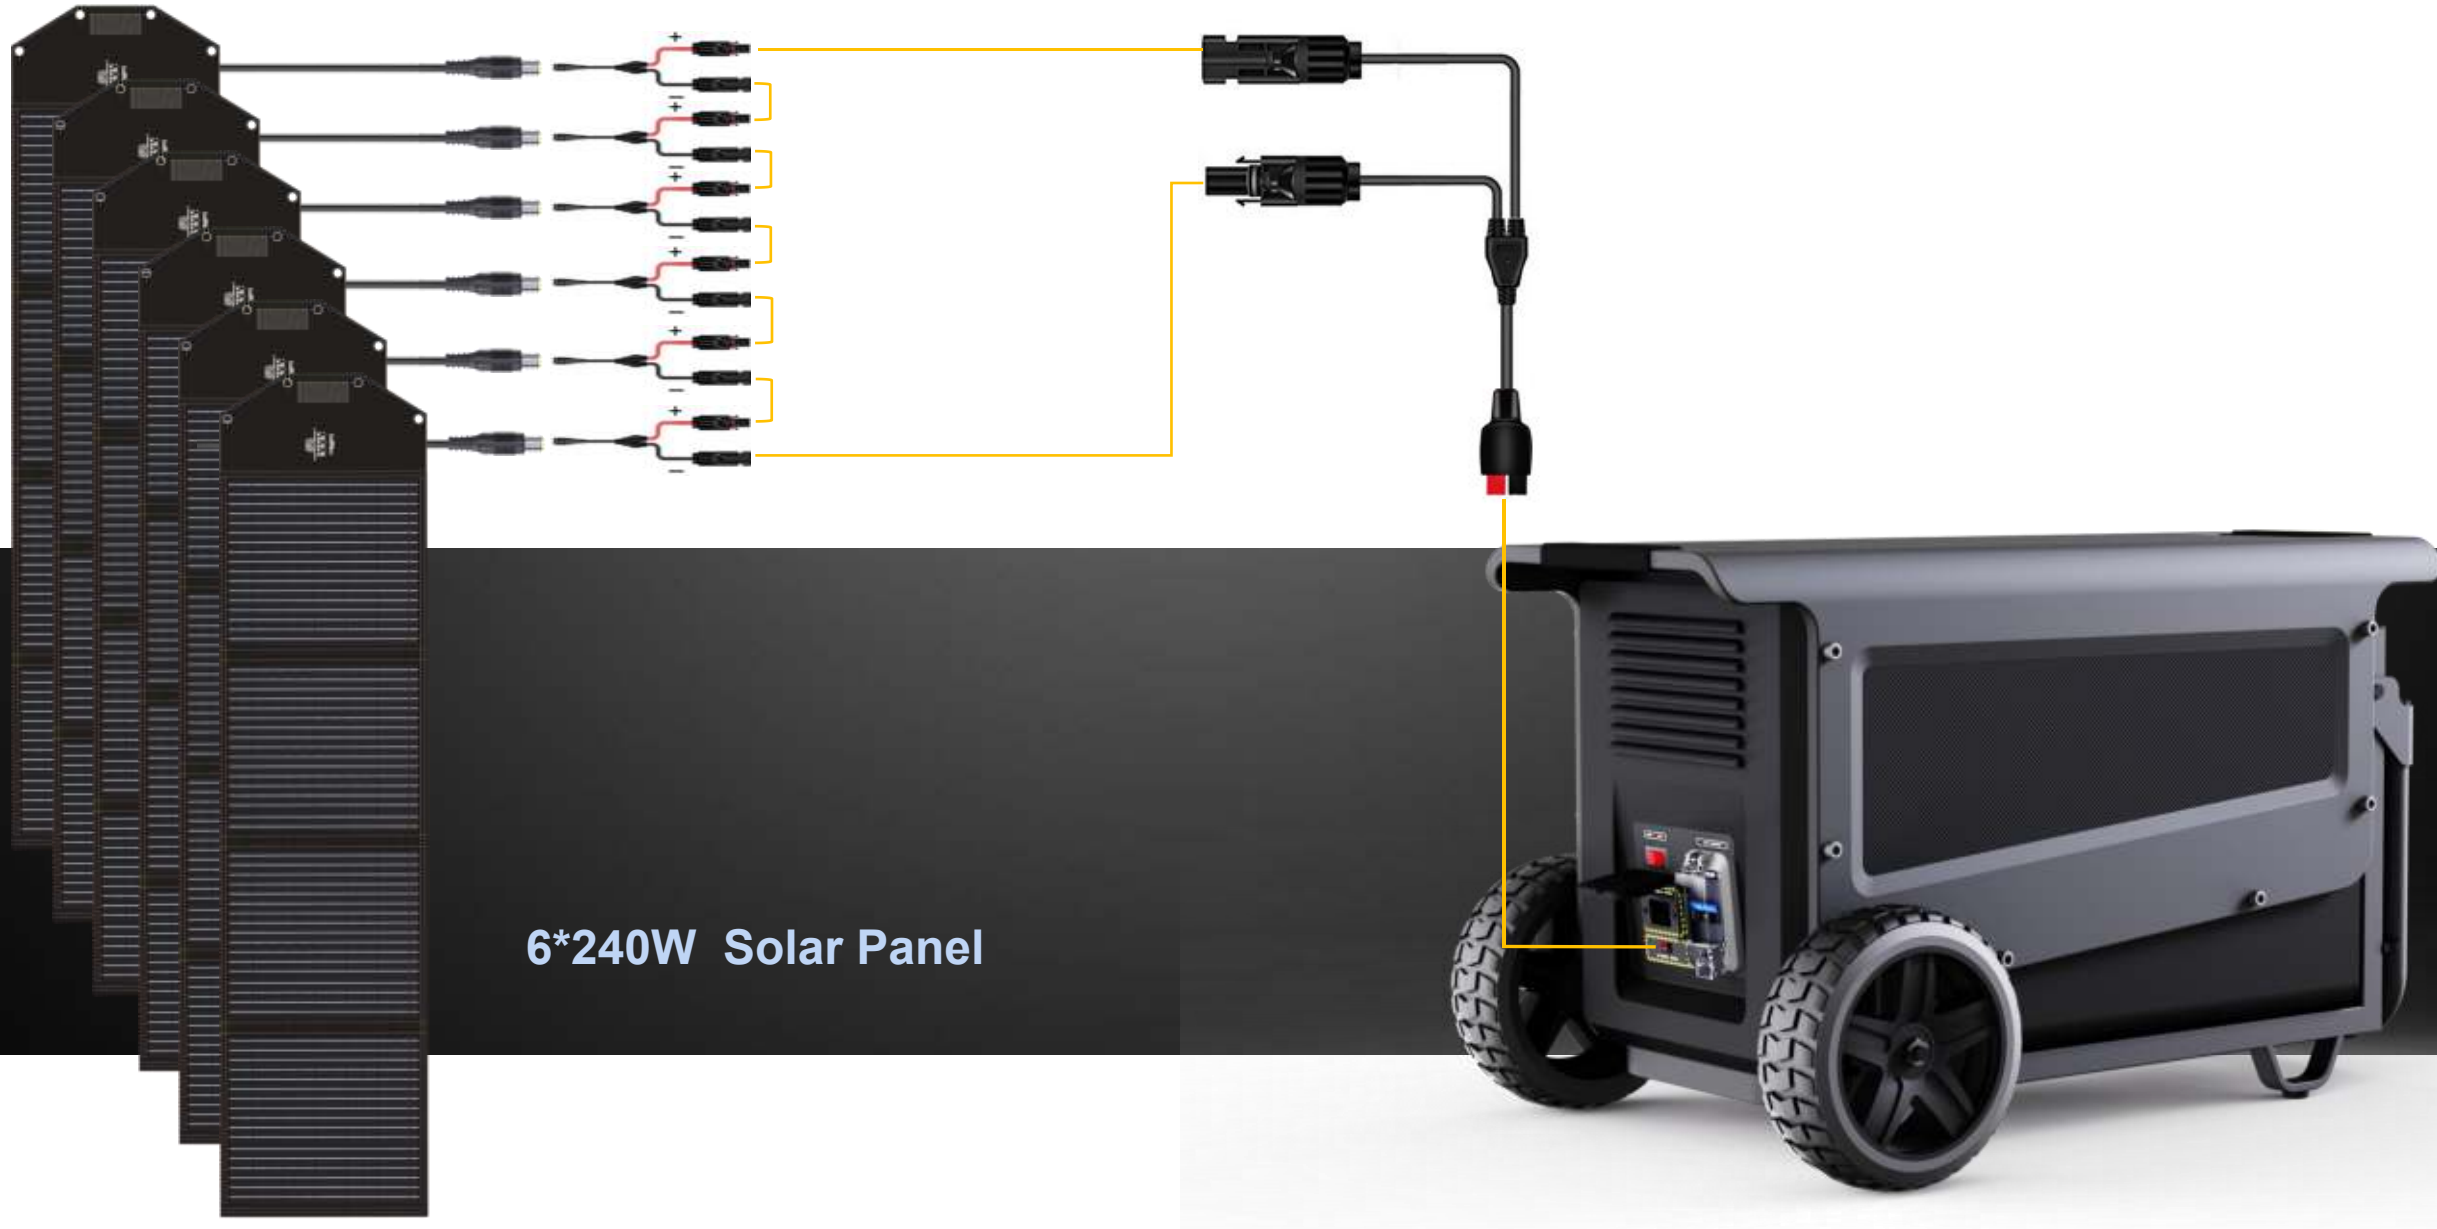

MPPT

Dynamic tracking of the maximum power of solar panel
Transfer efficiency is 15% higher than without MPPT

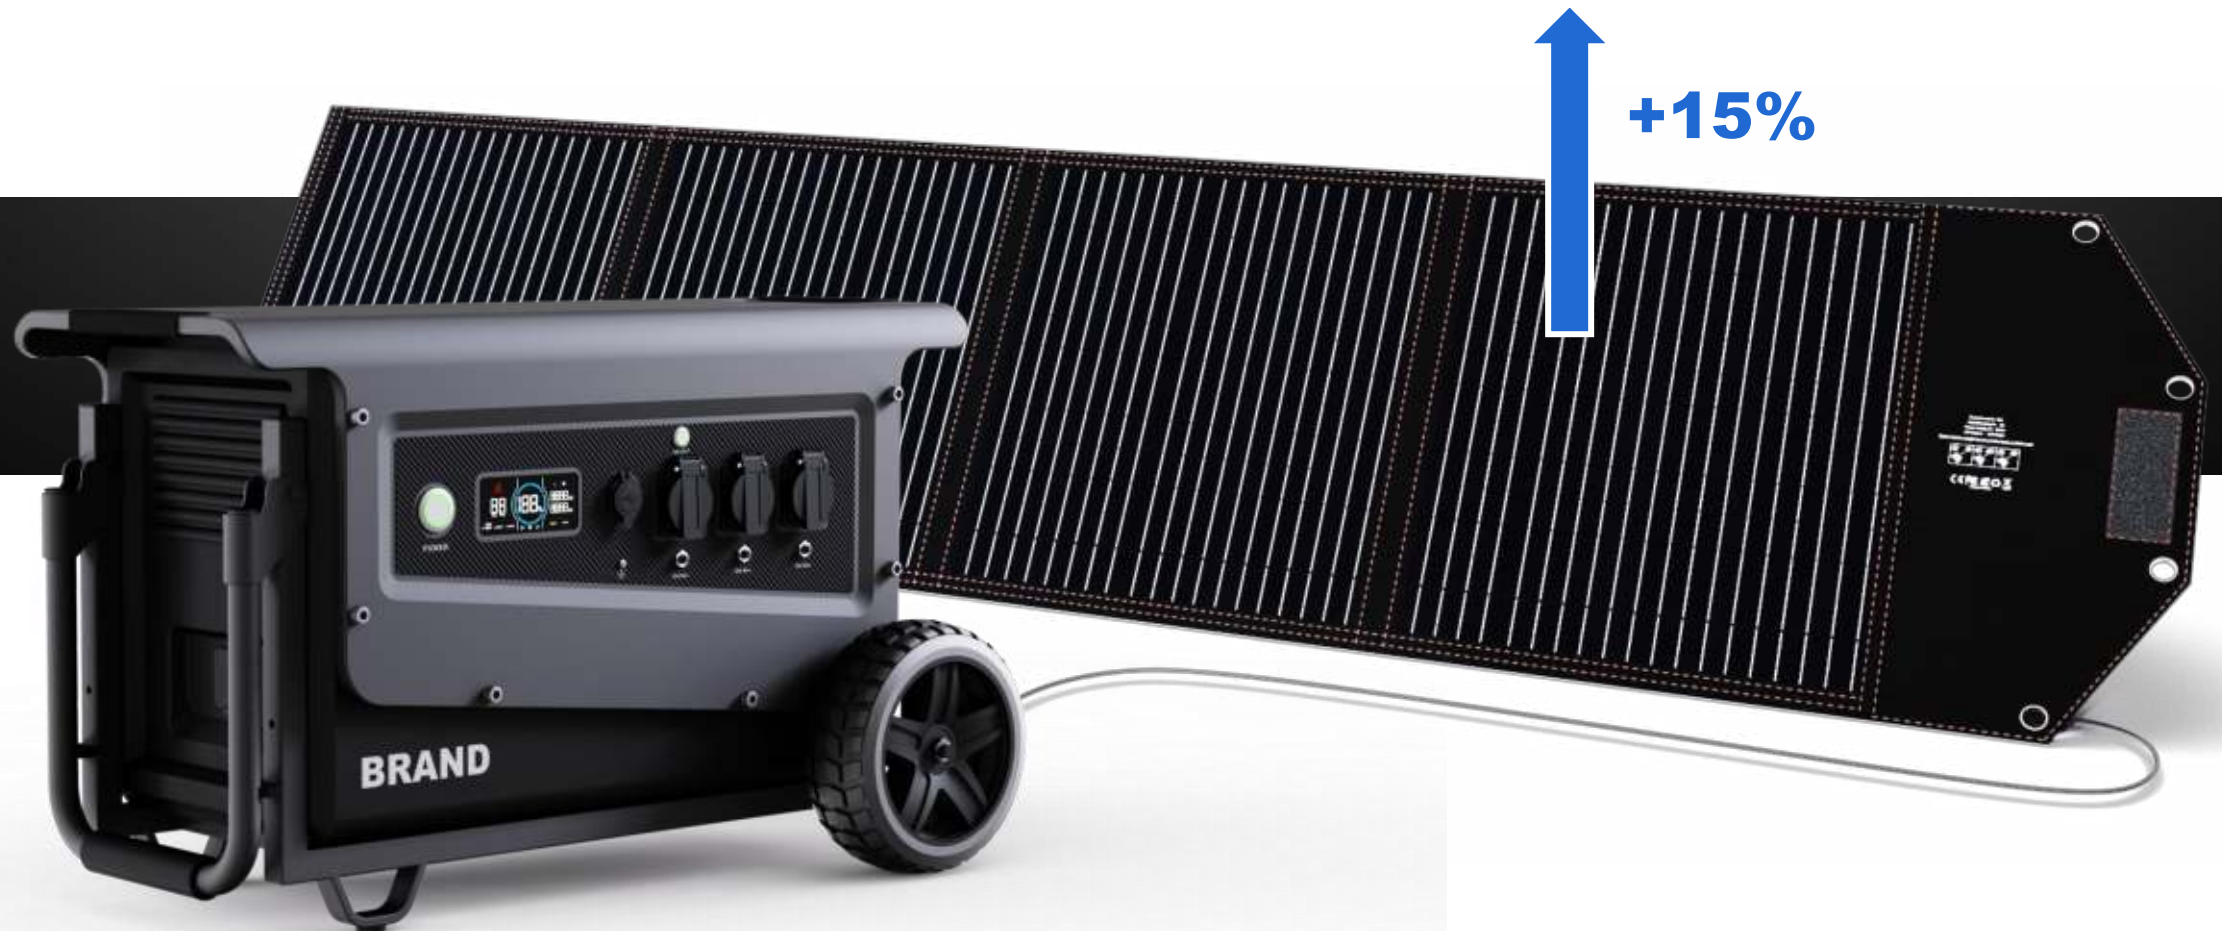

Parallel Packaging (can parallel multiple packs)

5040_{Wh} + 5040_{Wh}



THANKS!